

Overview

Like all other cards within the Audio ToolBox range, the AxC-AS16M/AxC-AS8M can be used in either the AVBx7 or AVBx3 platforms.

Using only one slot of the Audio ToolBox, the AxC-AS16M/AxC-AS8M provides 16 or 8 high-end Mic/Line input (both line and microphone level) with an incredible density for the AuviTran Audio ToolBox platform.


Key Features

- 16 or 8 microphone/line high density inputs card
- 16 or 8 balanced mic/line + high quality preamps
 - ◆ Input sensibility +24dBu to -56dBu
 - ◆ Analog gain range: 0 to +80dB (0.5dB step)
 - ◆ E.I.N. < -126dBu
 - ◆ Dynamic range > 115dB
 - ◆ THD+N < -90 dB
- Phantom power +48V, individually controllable for each input
- 2 or 1 Sub-DB25 female connectors
- A linear 0.5 dB step digital attenuator/gain gives access to an input sensibility from -56dBu to +24dBu.
- +48V phantom power activation per channel, preamp value setting,

Audio ToolBox Platform Overview

Smart, expandable, and sustainable: meet AuviTran's versatile and flexible platforms that brings convergence among network technologies and audio interfaces.

With two 19" rack chassis AVBx7 and AVBx3 both available in StageBox or Installation modes, plus 20 interface cards, build the configuration you need.

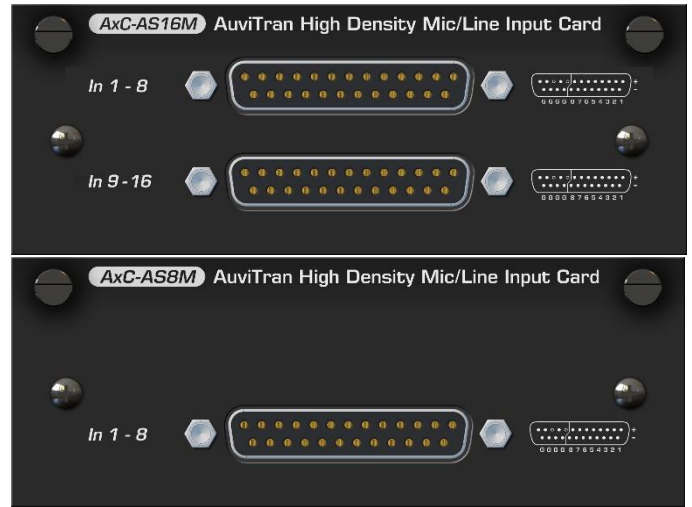

Mechanical Specifications

200 x 100 x 40 mm: AuviTran Audio ToolBox platform AxC card format

Applications

Suitable for all professional applications that request large numbers of high-quality Mic/Line inputs with a reduced size:

- Featuring extensive capacity of high-performance microphones and line pre-amplification, high class AD converter chips and excellent circuit design
- These card sets a new quality, price, density ratio standards for professional audio applications.
- Attenuation/gain settings and vu-meter can be controlled and monitored individually per channel via network for a remote management from virtually anywhere using AVS-Monitor via IP, Dante, AVB or EtherSound Networks
- Individual gains and +48V phantom activation remote controls are manageable by Yamaha HA remote protocol enabling direct control and monitoring from Yamaha console/mixer
- Dedicated control page for monitoring and controlling all the card parameters (gain, phantom power on each channel, preamp values, vu-meter)

Technical Specifications

General	
Size	200 mm x 100 mm x 40 mm –AuviTran Audio ToolBox platform cards format
Power Supply	+12V / +3.3V - Through AuviTran Audio ToolBox backplane
Storage: Temp / Humidity	-5°C to 70°C / 0% to 95% (non-condensing)
Operating: Temp / Humidity	0°C to 50°C / 5% to 90% (non-condensing)
Connectors	2x or 1x female DB25 connectors (Yamaha pinout) Optional: DB25 to Euro-Block plug available
Audio Inputs	
Number of inputs	AxC-AS16M: 16 Mic/line inputs AxC-AS8M: 8 Mic/line inputs
Audio Inputs Specifications	
Sampling Frequency	44.1kHz, 48kHz, 88.2kHz or 96kHz
ADC resolution	24 bits
Input specification	Balanced Mic/line
Input maximum level	+24 dBu
Audio Inputs MIC / Line Technical Specifications	
Analog Gain Range	0 to +80dB (0.5 dB step)
Input sensibility	+24dBu to -56dBu
Input Impedance	2,7 kΩ (differential)
E.I.N. @ (Rs=150Ω G=+80dB)	-126dBu
Dynamic Range	> 115dB A-weighted (> 112dB un-weighted)
THD+N (1KHz)	< -90 dB
Frequency response	20Hz – 20kHz +/- 0.2dB
Phantom Power	+48 V (individually controllable for each channel)
Integration Environment	
Audio ToolBox platform	AxC-AS16M/AxC-AS8M are cards for the AuviTran Audio ToolBox platform
AVS-Monitor	AVS-Monitor enables to remotely set, control, and monitor an IP, Dante, AVB network and provides enhanced control pages to manage the AxC-AS8M/AxC-AS16M card specific parameters.
OS Supported	Windows 10 for 32-64-bit versions

V1.1-3-092020

Part number

AxC-AS16M	AuviTran 16 high density mic/line inputs card with 2x Sub-DB25 female connectors
AxC-AS8M	AuviTran 8 high density mic/line inputs card with 1x Sub-DB25 female connectors
AxP-S8E	Optional Sub-DB-25 male plug towards 8x 3-pole Euroblocks