

AxC-MADI Overview

Just as every AxC card within the Audio ToolBox range, the AxC-MADI can equally be used in AVBx3 or AVBx7 platforms. AxC-MADI offers a convenient and popular solution for transmission of up to 2x64 channels between two devices.

Coupled to an AuviTran Audio ToolBox platform, AxC-MADI card provides the cost effective gateway to MADI connected devices.



Key Features

- MADI interface on both optical and coaxial connectors
- 64 or 56 channels modes supported
- Audio 24 bits, at 44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz
- Remote management with AVS-Monitor software
- Dedicated control page for monitoring and controlling all the card parameters

Audio ToolBox Platform Overview

Smart, expandable and sustainable: meet AuviTran's versatile and flexible platforms bringing convergence among network technologies and audio interfaces.

With two 19" rack chassis AVBx3 and AVBx7 both available in StageBox or Installation modes, plus 14 interface cards, build the configuration you need.

AVBx3 as Installation mode



AVBx7 as StageBox mode



Mechanical Specifications

200 x 100 x 40 mm: AuviTran Audio ToolBox platform AxC card format.

AxC-MADI Applications


Combined with other AuviTran Audio ToolBox cards, the AxC-MADI card opens exciting possibilities to the professional audio systems:

- ◆ EtherSound ES100 – MADI bridges, with unique connectivity possibilities (dynamic patching solution, remote control, ASIO recording/playback ...)
- ◆ MADI based stage boxes, in combination with the high performance AxC-AX4M high class mic/line preamps cards

AxC-MADI card can be inserted in an AVBx3 rack for two kinds of applications:

- Live applications (AVBx3 in Stage-box mode)
 - ◆ MADI audio StageBoxes
 - ◆ MADI Dante bridges
 - ◆ MADI EtherSound bridges
- Fixed installations (AVBx3 in Installation mode)
 - ◆ MADI connected audio systems
 - ◆ Broadcast centres and installation

AVS-Monitor Software control page

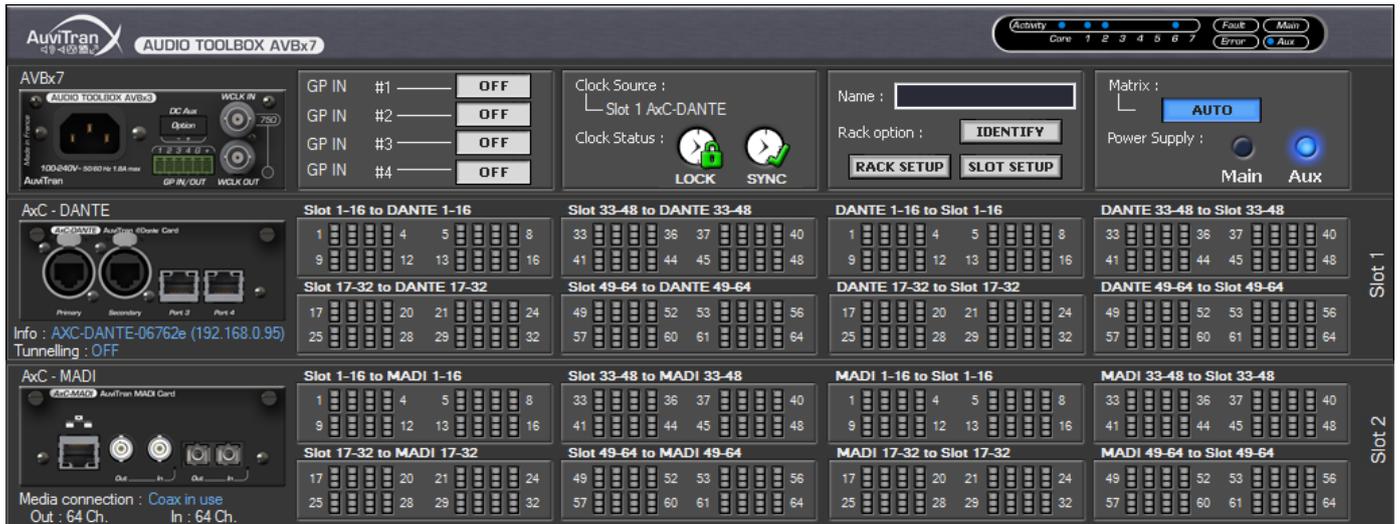

Technical Specifications

General	
Size	200 mm x 100 mm x 40 mm –AuviTran Audio ToolBox platform cards format
Power Supply	+12V / +3.3V - Through AuviTran Audio ToolBox backplane
Storage: Temp / Humidity	- 5°C to 70°C / 0% to 95% (non-condensing)
Operating: Temp / Humidity	0°C to 50°C / 5% to 90% (non-condensing)
Audio Inputs	
Number of i/o	Up to 64 digital inputs/outputs routed through the AuviTran Audio ToolBox backplane to the other cards of the AuviTran Audio ToolBox range
Audio Inputs Specifications	
Sampling Frequency	44.1 kHz / 48 kHz / 88.2 kHz / 96 kHz
A/D resolution	24 bits
Input specification	MADI 56 / 64 channels mode S-Mux or Multiple Rate
Integration Environment	
Audio ToolBox platform	AxC-MADI is one the cards for the AuviTran Audio ToolBox platform
AVS-Monitor	AVS-Monitor enables to remotely set, control and monitor an EtherSound network and provides enhanced control pages to manage the AxC-MADI card specific parameters.
OS Supported	Windows Seven/Vista/XP for 32 or 64 bit versions

V2-062017

Part number

AxC-MADI AuviTran Audio ToolBox MADI interface card